



ILLUMINATOR LED DROPLIGHT

SPECIFICATIONS

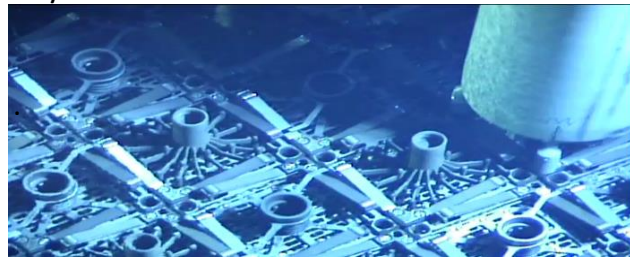

The economical Illuminator LED Nuclear Drop Light features 30,000 lumens of output. It comes standard with a 100 foot cable which has been designed to completely support the light head. The light head is field serviceable with changeable LED arrays. Input voltage is standard from 90-240 VAC 50/60 Hz.

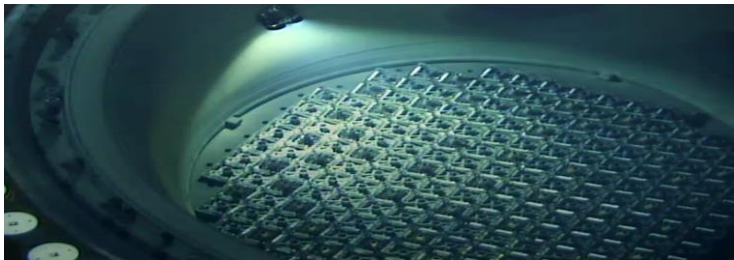

Light type	High-intensity LED
Output	30,000 lumens / adjustable dimmer for in-air mode
Color temperature	6,300 K
Voltage	90-240 VAC 60/50Hz
Beam Angle in Water	Vertical 80° : Horizontal 80°
Wetted Materials	Hard Anodized Aluminum / Stainless Steel / Neoprene / Polyurethane/Acrylic
Power Supply	12 x 6 x 2 in (305 x 152 x 51 mm)
Connectors	MCBHRA Series– Stainless /Neoprene
Weight in Water	2.5 lb (1.1 kg)
Operating Temperature	-10°C to 50°C (122°F) in water
Operability	In-Air or In-Water modes
Mounting Configuration	Multiple tilt angles available



5618 Copley Drive, San Diego, CA 92111
858.565.8500 | www.rosys.com | sales@rosys.com